


MTU26R

MUSCLE TRACTOR

All components are assembled in our HQ Japan factory by best in class, exceptionally superior, and durable materials with ultra-precision engineering creates reliable performance and it becomes a long partner with you.

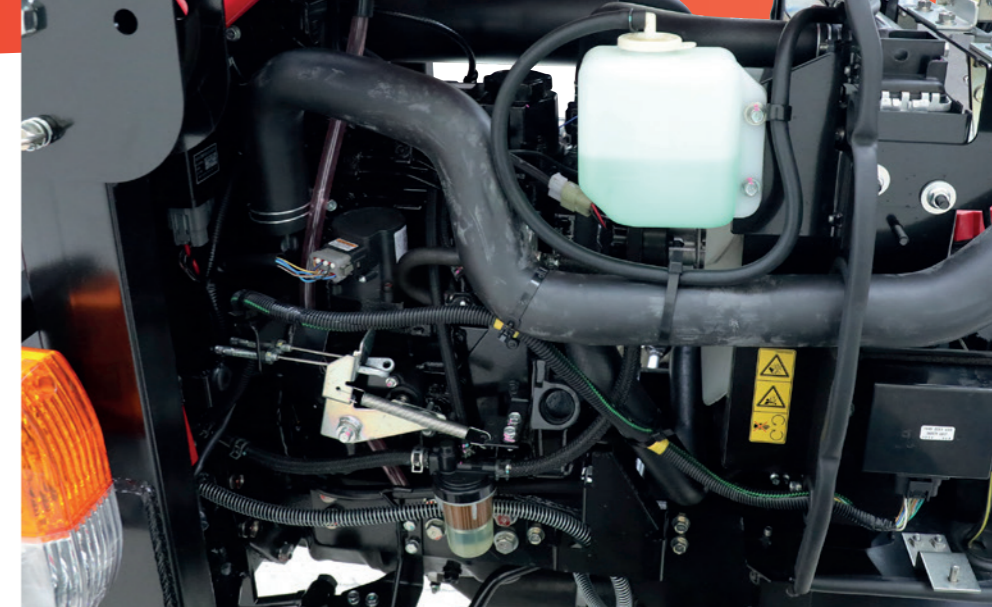

Engine

The powerful Mitsubishi Stage V, 3 cylinder, water-cooled diesel engine delivers dynamic power, stable torque, low noise with minimum vibration.




Equipped with power steering

Easy use and maneuverability in various scene.

Mid PTO & auxiliary valve*

For additional hydraulic attachments.
*Option available to control external functions.

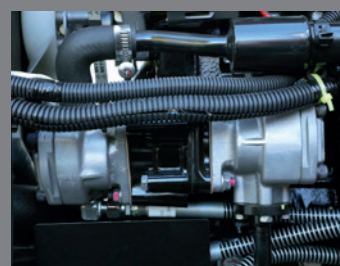

Pump

Large capacity hydraulic pump generates additional power for larger lawn and ground care equipments.



Transmission

With the stepless 3-group hydrostat or the 8F/8R synchro shuttle the driver can work comfortably all day long.



Stability

Long wheelbase and high clearance make for straight and powerful traction.



Meter panel

Good visibility of meter panel to keep you in safety and comfortable operation of your tractor.



HST pedal

Maximized friendly design and ease of use for changing direction and speed.



Simple maintenance

Full open bonnet is enabling easy access to battery, radiator screen, air cleaner, cooling water reserve tank and engine oil level gauge for daily maintenance.



PTO and PTO switch

Independent PTO of MTU26R operated by electric switch.



Deluxe seat

Driver's seat mechanically suspended.



Lighting

The lighting ensures safety and good visibility at the workplace.

Model		MTU26R	MTU26RH
Engine			
Type		water-cooled diesel	water-cooled diesel
Power	HP	24.7	24.7
No. of cylinders		3	3
Displacement	cc.	1318	1318
Rated speed	rpm.	2500	2500
PTO power	HP	18.5	18.5
Fuelsystem			
Fuel capacity	l.	27.0	27.0
Injection type		Indirect Diesel Injection	Indirect Diesel Injection
Drivetrain			
Transmission type		Gear	HST
Speed (gear F/R)		8 / 8 (synchro shuttle)	3 range
Brakes		wet disc	wet disc
Hydraulics			
Position control		standard	standard
Hydraulic pump capacity	l./min	28.5	28.5
maximum pressure	bar	155	155
Steering pump capacity	l./min	12.2	12.2
maximum pressure	bar	105	105
Auxiliary valve		Option	Option
PTO			
Type		independent	semi-independent
Rear PTO rpm		540 /1000	540
Rear PTO shaft size		1-3/8	1-3/8
Mid PTO rpm		-	Option 2000
Mid PTO shaft size		-	SAE 1" - 15 teeth
Steering			
Power steering		hydrostatic (std.)	hydrostatic (std.)
Turning radius (AG tyres/ brake)	m	2.4	2.4
Hitch			
Type		Category I	Category I
Lift capacity at hitch ball	kg	1200	1200
Tyres			
AG tyres	Front	7-16	7-16
	Rear	11.2-24	11.2-24
Turf tyres	Front	212/80D15	212/80D15
	Rear	355/80D20	355/80D20
Dimensions (AG tyres)			
Wheelbase	mm	1710	1710
Overall width	mm	1400	1400
Overall length	mm	3190	3190
Height	mm	2389	2389
Ground clearance	mm	325	325
Weight	kg	1176	1180

We reserve the right to discontinue models or change specifications without notice.

MITSUBISHI
AGRICULTURAL MACHINERY

MITSUBISHI TRACTOR

MTU26R



MTU26R



MTU26RH



2389 mm

325 mm

1400 mm



SHIBAURA

SHIBAURA EUROPE BV
Begonialaan 7
NL - 6851 TE Huissen
Tel. (0031) 026 326 9999
Fax (0031) 026 326 9990
E-mail: info@shibaura.com
www.shibaura.com

Dealer: